


DS SERIES

DS552LT5


55" Fanless High Brightness Digital Signage



**SUNLIGHT
VIEWABLE IMAGE**




FANLESS



**BUILT-IN
MEDIA PLAYER**



**SUSTAINED
HIGH BRIGHTNESS**



**TRUECOLOR™
CALIBRATED**

FOR MORE INFORMATION

For more information about DynaScan, visit our site at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.




DynaScan

SPECIFICATION

MODEL	DS552LT5	
PANEL	LCD Panel Type	54.64 inches LCD
	Native Resolution	1920 x 1080
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	4000 nits
	Color Depth	8 bits
	Contrast Ratio	3000:1
	Response Time (Typ.)	9 ms
	Viewing Angle (H/V)	178° / 178°
	Light Life Time (Typ.)	100,000 hrs
POWER	Panel Surface	AR, 2H
	Blackening Defect Free	Up to 110°C (230°F)
	Polarized Sunglasses Support	Yes
	Power Supply	Internal
MECHANICAL SPECS	Rated Voltage	100-240V ~ 50/60Hz
	Power On Mode (Typ./ Max.)	160 W / 240 W [TBC]
	Power Saving Mode	< 1 W
USER INTERFACE	AC out	< 100 W
	Bezel Width (T/B/L/R)	Even bezel 10.9 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	1239.4 x 710.0 x 87.7 mm
	Monitor Weight	27.5 kg
	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	400 x 400 mm
	Carring Handles	Yes
	Fanless Design	Yes
	INPUT	Language
Built-in Video Wall Support		Up to 15x15
Support SNMP (Up to V3.0)		Yes
Dimming Control		Yes
Proof of Image Retention		Yes
Auto Orientation Sensor		Yes
Ambient Light Sensor		Yes
Power On/Off Scheduling		Yes
Internal Temperature Sensor		Yes
OSD Menu Rotation		Yes
OUTPUT	HDMI	x1 (1080p)
	DVI-D	x1
	Display Port	x1
	USB	x1 (For Internal Player)
	Micro SD Slot	x1 (For Internal Player)
EXTERNAL CONTROL	DVI-D	x1
	Audio	x1
	RS-232	In x1, Out x1
INTERNAL PLAYER	RJ-45	x1 (LAN)
	Operating System	Android 7.12
	Processor	ARM Quad-Core Cortex-A7
	Clock Speed	1.2 GHz
	Main Memory Interface	DDR3L-1066, 1GB
	Graphics	Mali-400MP2 GPU, Support OpenGL ES1.1/2.0
	Storage	Internal: Nand flash 8GB(multi sources) External: Support Micro SD , Up to 32GB
	Multimedia	VP8/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
	Wi-Fi Specification	802.11b/g/n 2412.0MHz - 2462.0MHz
	ENVIRONMENT	Operating Temperature
Storage Temperature		-20° C ~ 60° C
Humidity		10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS	

DIMENSIONS

Unit: mm [inch]

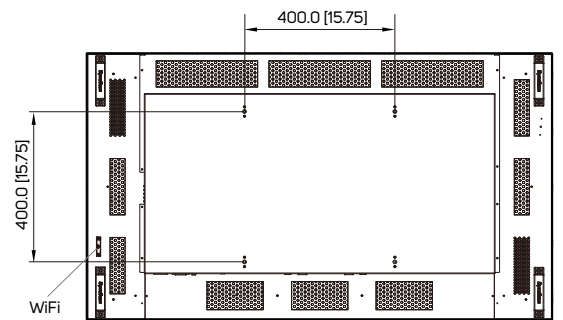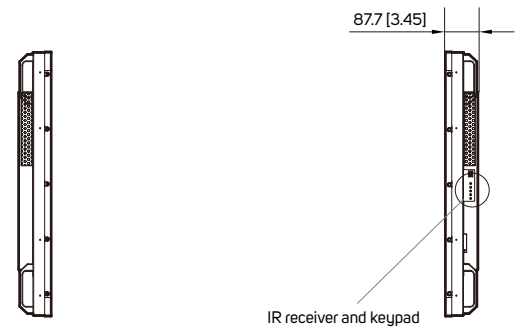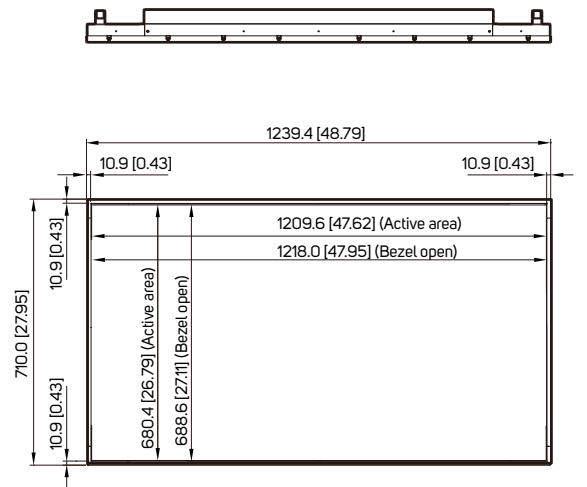

INTERFACE

